


WHAT IS CLAIMED IS:

1. A thermoplastic molding composition comprising
  - (A) at least one aromatic polycarbonate and/or polyester carbonate,
  - (B) at least one graft polymer,
- 5 (C) at least one oligophosphate of the general formula

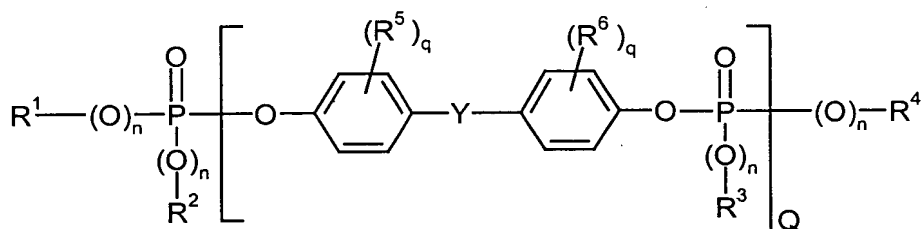

in which the radicals

- 10 R<sup>1</sup>, R<sup>2</sup>, R<sup>3</sup> and R<sup>4</sup> independently of one another denote a member selected from the group consisting of C<sub>1</sub> to C<sub>8</sub> alkyl, C<sub>5</sub> to C<sub>6</sub> cycloalkyl, C<sub>6</sub> to C<sub>10</sub> aryl and C<sub>7</sub> to C<sub>12</sub> aralkyl,
- n independently of one another is 0 or 1,
- q independently of one another is 0, 1, 2, 3 or 4,
- 15 Q is 0.5 to 30,
- R<sup>5</sup> and R<sup>6</sup> independently of one another denote C<sub>1</sub> to C<sub>4</sub> alkyl or halogen, and
- Y denotes a member selected from the group consisting of C<sub>1</sub> to C<sub>7</sub> alkylidene, C<sub>1</sub> to C<sub>7</sub> alkylene, C<sub>5</sub> to C<sub>12</sub> cycloalkylene, C<sub>5</sub> to C<sub>12</sub> cycloalkylidene, -O-, -S-, -SO-, -SO<sub>2</sub>- and -CO-,
- 20 (D) at least one anti-drip agent and
- (E) at least one polyhydroxy ether.

2. The composition according to Claim 1, wherein (A) is contained in an amount of 5 to 98.9 wt.% referred to the composition.

- 25 3. The composition according to Claim 1, wherein (A) is contained in an amount of 10 to 90 wt.% referred to the composition.

4. The composition according to Claim 1, wherein (A) is contained in an amount of 40 to 80 wt.% referred to the composition.

5. The composition according to Claim 1 wherein (B) is contained in an amount of 1 to 94.9 wt.% referred to the composition.

5 6. The composition according to Claim 1 wherein (B) is contained in an amount of 2 to 40 wt.% referred to the composition.

7. The composition according to Claim 1 wherein (B) is a graft polymer of 5 to 95 wt.% of at least one vinyl monomer on 95 to 5 wt.% of at least one graft base with a glass transition temperature of less than about 10°C.

8. The composition according to Claim 7, wherein the graft base is a member selected from the group consisting of diene, EP(D)M, acrylate and silicone rubbers.

9. The composition according to Claim 7 wherein the graft polymer is at least one of emulsion ABS and bulk ABS.

10. The composition according to Claim 1 wherein (C) is contained in an amount of 0.01 to 40 wt.% referred to the composition.

11. The composition according to Claim 1 wherein (C) is contained in an amount of 1 to 25 wt.% referred to the composition.

12. The composition according to Claim 1 wherein (D) is contained in an amount of 0.01 to 5 wt.% referred to the composition.

13. The composition according to Claim 1 wherein (D) is contained in an amount of 0.01 to 2 wt.% referred to the composition.


14. The composition according to Claim 1 wherein (D) is at least one member selected from the group consisting of polytetrafluoroethylene, polyvinylidene fluoride or tetrafluoroethylene/hexafluoropropylene copolymers and ethylene/tetrafluoroethylene copolymers.

15. The composition according to Claim 1 wherein (E) is contained in an amount of 0.01 to 10 wt.% referred to the composition.

16. The composition according to Claim 1 wherein (E) is contained in an amount of 0.05 to 5 wt.% referred to the composition.

17. The composition according to Claim 1 wherein (E) is contained in an amount of 0.1 to 3 wt.% referred to the composition.

5 18. The composition according to Claim 1 wherein the polyhydroxy ether contains a repeating unit of formula (IV)



10 19. The composition according to Claim 1 further containing (F) at least one member selected from the group consisting of thermoplastic vinyl (co)polymer and polyalkylene terephthalate.

20. The composition according to Claim 1 further containing (G) a particulate inorganic powder having a mean particle size of less than about 2000 nm .

15 21. The composition according to claim 20 wherein inorganic powder is a member selected from the group consisting of boehmite and talcum.

20 22. The composition according to Claim 1 further containing (H) at least one additive selected from the group consisting of lubricants, mold release agents, nucleating agents, antistatics, stabilizers, fillers, reinforcing agents, dyes and pigments.

23. A method of using the composition according to Claim 1 comprising molding an article.

24. The molded article prepared by the method of Claim 23.